

Properties	Unit	Typical value	Test Method
Polymer Properties			
Density (23 oC)	Kg/m ³	950	ISO 1183
MFI (190 oC /21.6Kg)	Dg/min	22	ISO 1133
MFI (190 oC /2.16Kg)	Dg/min	0.3	ISO 1133
Bulk Density	g/cm ³	>0.5	ISO 1133
Mechanical properties			
Tensile Modulus of elasticity	MPa	1000	ISO527-1
Tensile stress at Yield	MPa	25	ISO 527-1
Tensile strain at Yield	%	9	ISO 527-1
Notched Tensile impact strength(-30 oC)	KJ/m ²	110	ISO 8256/1A
Thermal Properties			
HDT,(0.45 MPa)	°C	75	ISO 75B-1
HDT,(1.80 MPa)	°C	43	ISO 75A-1
Melting Point	°C	131	ISO 11357
Vicat Temperature (B50,50 oC/h , 50 N)	°C	78	ISO 306
Hardness			
Ball indentation Hardness (H 132/30)	MPa	45	ISO 2039-1
FNCT (3.5MPa, 80°C, 2% Igepal BC/9)	h	6	ISO/CD 16770
ESCR(bottle test)	h	150	Basell
Additive : Antioxidant-Heat stabilizer			

Notes:

Typical values; not to be construed as specifications

HDPE



Application

HCH 5020 is suitable for Extrusion Blow Moulding (Small blow mouldings, Engineering parts), Packaging of consumer goods, Packaging of dangerous goods, Packaging of surfactants

General information

HCH5020 has been manufactured using Basell Lupotech G licensed technology

Processing:

Recommended melt temperatures: 170 - 200°C

Packaging

Supplied in pellet form and can be packaged in 25kg bags, 1 ton semi bulk or 17 ton bulk.

Food packaging

The above mentioned grade meets the relevant requirements of plastics directive 2002/72/EC (06-08-2002) and its amendments till directive 2008/39EC relating to plastic materials and articles intended to come into contact with foodstuffs .

Pharmaceutical Application

The above mentioned grade meets the requirements of the European pharmacopeia version 6 section 3.1.5 for pharmaceutical application.

Conveying

Conveying equipment should be designed prevent accumulation of fines and dust particles can, under certain conditions, pose an explosion hazard. We recommend that the conveying system used:

1. be equipped with adequate filters
2. is operated and maintained in such a manner to ensure no leaks develop
3. that adequate grounding exists at all times

We further recommended that good housekeeping will practiced throughout the facility

HDPE



Storage


As ultraviolet light may cause a change in the material, all resins should be protected from direct sunlight and/or heat during storage. The storage location should also be dry, dust free and the ambient temperature should not exceed 50 °C. It is also advisable to process polyethylene resins (in pelletized or powder form) within 6 months after delivery, this because also excessive aging of polyethylene can lead to a deterioration in quality.

Handling

Minimal protection to prevent possible mechanical or thermal injury to the eyes. Fabrication areas should be ventilated to carry away fumes or vapors.

Combustibility

Polyethylene resins will burn when supplied adequate heat and oxygen. They should be handled and stored away from contact with direct flames and/or other ignition sources .in burning; polyethylene resins contribute high heat and may generate a dense black smoke. Fires can be extinguished by conventional means with water and mist preferred. In enclosed areas, fire fighters should be provided with self contained breathing apparatus.

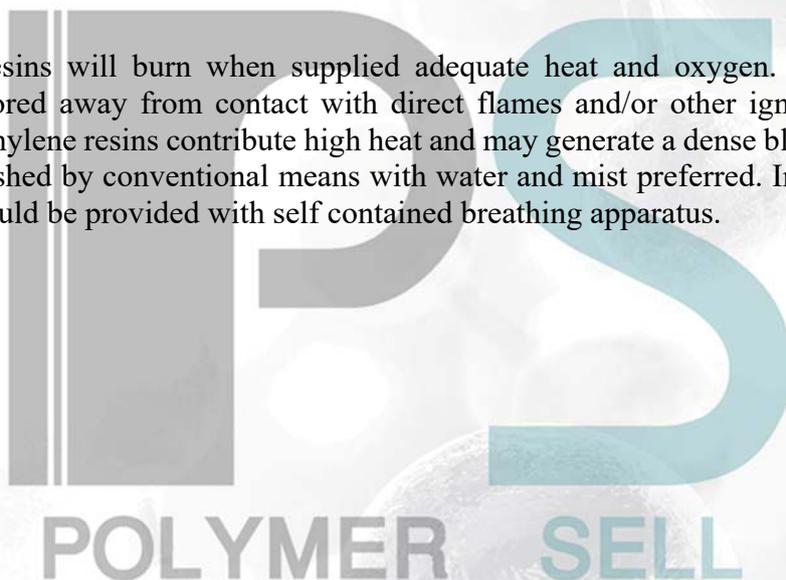

HDPE



POLYMER
SELL

HDPE HCH 5020



HDPE

